


Square Bore Series With Spherical Outer Ring - Relubricable Type

GW 211PPB17

Square Bore Series With Spherical Outer Ring - Relubricable Type

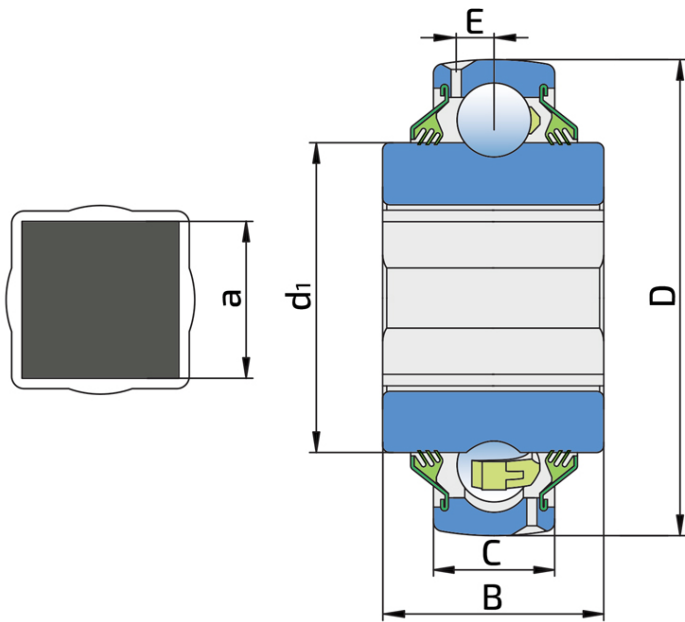

Technical Specification

| | | |
|------------------|----------------------------------------------------------|------------|
| D | Outside diameter | 3.937 inch |
| D | Outside diameter | 100 mm |
| B | Width inner ring | 1.752 inch |
| B | Width inner ring | 44.5 mm |
| C | Width outer ring | 1.313 inch |
| C | Width outer ring | 33.34 mm |
| d1 | Outer diameter inner ring | 2.72 inch |
| d1 | Outer diameter inner ring | 69.1 mm |
| E | Distance from raceway centre to the hole for lubrication | 0.279 inch |
| E | Distance from raceway centre to the hole for lubrication | 7.1 mm |
| a | Shaft size | 1.53 inch |
| a | Shaft size | 38.9 mm |
| kg | Mass | 1.15 kg |
| C _{dyn} | Dynamic load rating | 43.5 kN |
| C _o | Static load rating | 29 kN |
| P _u | Fatigue load limit | 1.218 kN |

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

