
Hexagonal Bore Series With Cylindrical Outer Ring

205PP13

Hexagonal Bore Series With Cylindrical Outer Ring





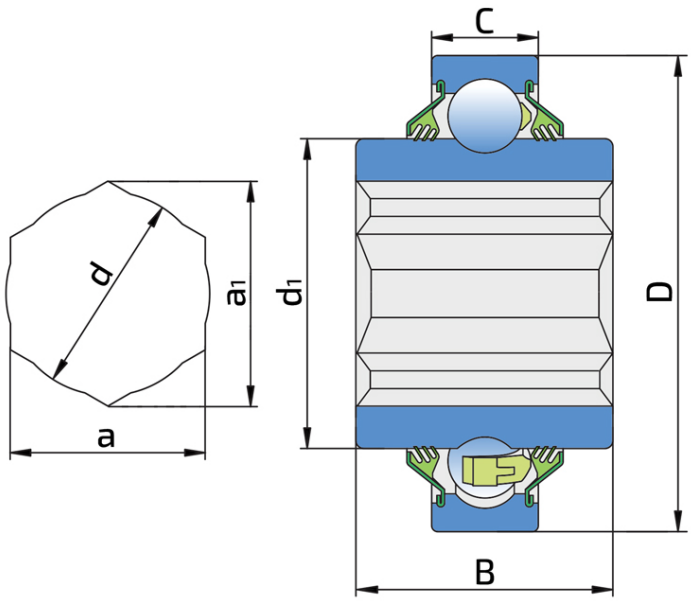


Technical Specification

D	Outside diameter	2.0472	inch
D	Outside diameter	52	mm
B	Width inner ring	1	inch
B	Width inner ring	25.4	mm
C	Width outer ring	0.591	inch
C	Width outer ring	15	mm
d1	Outer diameter inner ring	1.329	inch
d1	Outer diameter inner ring	33.74	mm
a	Hexagonal bore	0.875	inch
a	Hexagonal bore	22.25	mm
a	Shaft size	7/8	inch
a1	Diagonal of the hexagon	1.01	inch
a1	Diagonal of the hexagon	25.65	mm
d	Bore diameter	0.898	inch
d	Bore diameter	22.8	mm
Cdyn	Dynamic load rating	14	kN
Co	Static load rating	7.8	kN
kg	Mass	0.2	kg

Sealing

T SEAL / T SEAL (2T)



3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on
the both side.