


Square Series

GWST 209PPB12

Square Series
Disc Harrow

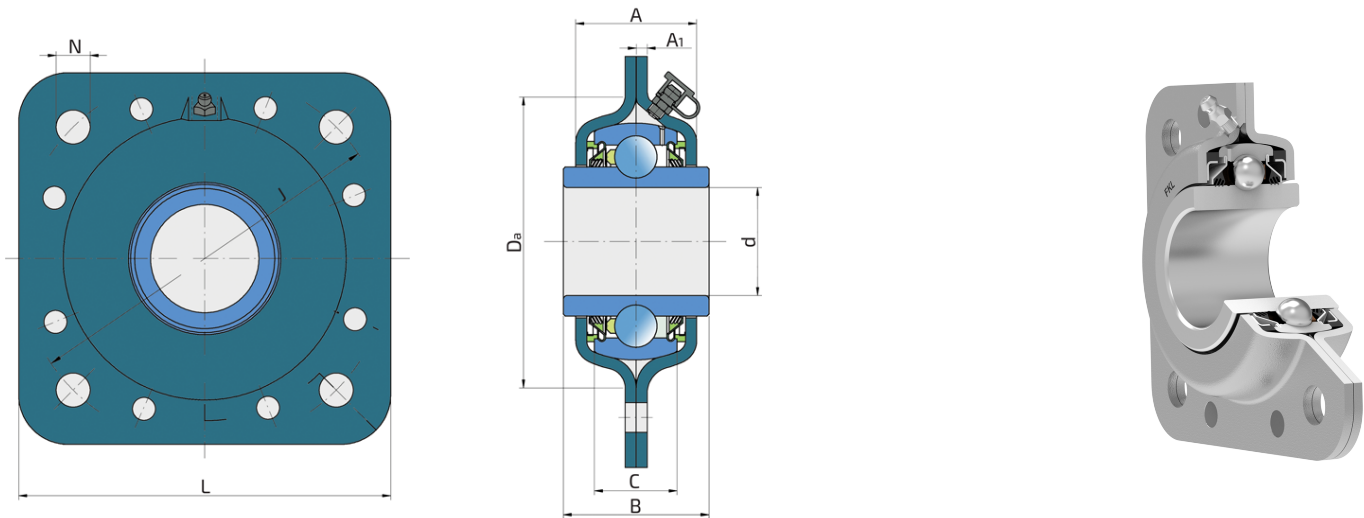

Technical Specification

| | | |
|------|--|------------|
| d | Bore diameter | 1.765 inch |
| d | Bore diameter | 44.831 mm |
| B | Width inner ring | 42.85 mm |
| C | Width outer ring | 22 mm |
| Da | Centering diameter | 97 mm |
| L | Overall length | 127 mm |
| A | Distance from the housing flange to the front of the inner ring of the bearing | 39 mm |
| A1 | Width of the top of the housing | 3.5 mm |
| J | Pitch circle diameter | 127 mm |
| N | Diameter of attachment slot | 13.5 mm |
| Fr | Radial load | 7.7 kN |
| Fa | Axial load | 3.8 kN |
| kg | Mass | 1.51 kg |
| Cdyn | Dynamic load rating | 32.5 kN |
| Co | Static load rating | 20.4 kN |

Sealing

RUBBER PLUG + T SEAL / T SEAL + RUBBER PLUG

3-lip seal seal on both sides provide long lasting protection of the bearing against the penetration of contaminants. Rubber plugs are protecting the area between the bearing and sheet metal housing.

