
Y-Ball Bearings with Integral Adapter Sleeve

UH 209/40 2T.SH

Y-Ball Bearings with Integral Adapter Sleeve Harvester



| | | 40 mm |
|------|----------------------------|-----------|
| D | Outside diameter | 85 mm |
| W | KM nut outside diameter | 65 mm |
| D2 | MB Washer outside diameter | 69 mm |
| B1 | Width adapter sleeve | 39 mm |
| С | Width outer ring | 23 mm |
| L | KM nut width | 10 mm |
| М | Thread adapter sleeve | 45x1.5 mm |
| kg | Mass | 0.737 kg |
| Cdyn | Dynamic load rating | 33.2 kN |
| Со | Static load rating | 21.6 kN |
| Pu | Fatigue load limit | 0.91 kN |

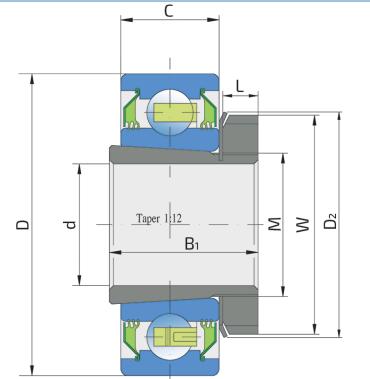









Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.

