
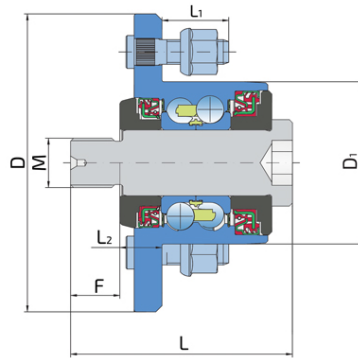


AGRO POINT HUB

IL50B-108/5T-M24x2-RH(LH)

AGRO POINT HUB
Seeding Machine



Technical Specification

J	Pitch circle diameter	108 mm
D	Outside diameter	145 mm
D1	Center bore on the disc	79 mm
M	Outer Thread	M24x2 mm
L	Total length	108 mm
L1	Stud thread length	32.5 mm
L2	The distance from the mounting surface to the front of the flange on which the disc is installed	20.5 mm
D3	The outer diameter of the hub body	79 mm
F	Length of threaded part	24 mm
kg	Mass	3.985 kg
Cdyn	Dynamic load rating	60 kN
Co	Static load rating	45.8 kN
Pu	Fatigue load limit	1.924 kN

Sealing

FORGED COVER PLATE+DIRTBLOCK SEAL+RS SEAL / RS SEAL+DIRTBLOCK SEAL+FORGED COVER PLATE

RS seal and dirtblock seal with cover plate on both sides provide equal protection against contaminants. Dirtblock seal is designed for hard working condition at unfriendly environment. Half metal - half rubber outside diameter provides reliable seal retention in the bore and improves sealing performance. Inside diameter is covered by rubber and improves sealing performance and easy installation. This sealing provides maximum protection against liquid or solid contaminants, which significantly extends bearing service life.

The

Cover plate protect the Dirtblock seal from mechanical damage.

