


Bearing Unit

LENN 210 2T

Bearing Unit

Universal Solution



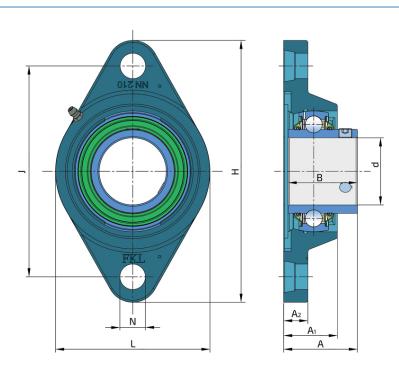



Technical Specification

| d | Bore diameter | 50 mm |
|------|----------------------------|----------|
| Н | Housing height | 195 mm |
| L | Total length | 115 mm |
| J | Distance between the holes | 157 mm |
| N | Hole diameter | 19 mm |
| Α | Overall width | 55 mm |
| A1 | Total housing width | 40 mm |
| A2 | Housing flange thickness | 18 mm |
| В | Width inner ring | 51.6 mm |
| kg | Mass | 2.13 kg |
| Cdyn | Dynamic load rating | 35.1 kN |
| Со | Static load rating | 23.2 kN |
| Pu | Fatigue load limit | 0.974 kN |



Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

