


The Bearing Solution For Seeding Machines, Integrated Flange

IL20S-75/4H-M16

The Bearing Solution For Seeding Machines, Integrated Flange
Seeding Machine

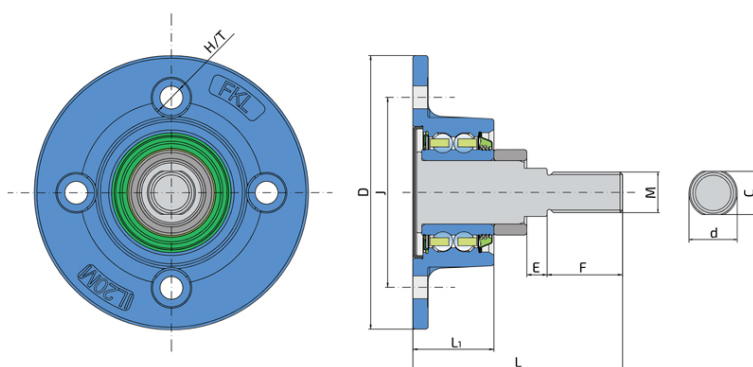

Technical Specification

J	Pitch circle diameter	75 mm
D	Outside diameter	108 mm
H/T	Hole/Thread	4x9 mm
d	Bore diameter	19 mm
C	D-shape hole cut out dimension	17 mm
M	Outer Thread	M16 mm
L	Total length	82.8 mm
L1	Total flange length	32 mm
E	Length of D shape	8 mm
F	Length of threaded part	29.8 mm
kg	Mass	0.973 kg
Cdyn	Dynamic load rating	21.6 kN
Co	Static load rating	14.3 kN
Pu	Fatigue load limit	0.601 kN

Sealing

SHEET METAL SHIELD + RS SEAL / T SEAL

Sheet metal shield and RS seal on the base side and 3-lip seal on the front side. Sheet metal shield and RS seal together with attached disc eliminates the possibility of contamination from the base side. The 3-lip seal on the front side protects the bearing from contaminant penetration.

