


Y-Ball Bearings With Grub Screw Locking

LE 215 2TB

Y-Ball Bearings With Grub Screw Locking



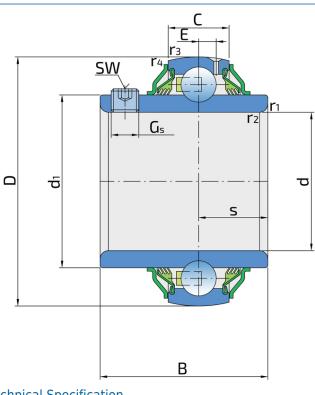



Technical Specification

d	Bore diameter	75 mm
D	Outside diameter	130 mm
В	Width inner ring	73.3 mm
С	Width outer ring	29 mm
S	Distance from inner ring side face to raceway centre	27 mm
d1	Outer diameter inner ring	92.1 inch
E	Distance from raceway centre to the hole for lubrication	8.3 mm
Gs	Set screw	M10x1 mm
SW	Hexagonal key size for set screw	5 mm
r1,2	Inner ring Chamfer dimension	1.5 mm
r3,4	Outside ring Chamfer dimension	2 mm
Cdyn	Dynamic load rating	66.3 kN
Со	Static load rating	49 kN
Pu	Fatigue load limit	2.04 kN
kg	Mass	2.1 kg



Sealing

METAL FLINGER RING+T SEAL / T SEAL+ METAL FLINGER RING (2TB)

3-lip seal with Metal flinger ring on the both side of the bearing, provides equal protection against contamination. The Metal flinger ring protects the seal from mechanical damage.

