


Round Bore Series With Cylindrical Outer Ring - Relubricable Type

GW 211PP25

Round Bore Series With Cylindrical Outer Ring - Relubricable Type
Disc Harrow

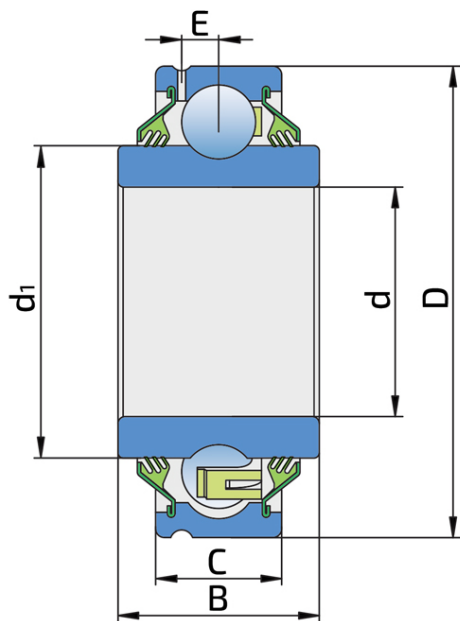

Technical Specification

| | | |
|------------------|--|-----------|
| d | Bore diameter | 1.78 inch |
| d | Bore diameter | 45.212 mm |
| D | Outside diameter | 3.94 inch |
| D | Outside diameter | 100 mm |
| B | Width inner ring | 1.75 inch |
| B | Width inner ring | 44.5 mm |
| C | Width outer ring | 1.31 inch |
| C | Width outer ring | 33.34 mm |
| d1 | Outer diameter inner ring | 2.72 inch |
| d1 | Outer diameter inner ring | 69.1 mm |
| E | Distance from raceway centre to the hole for lubrication | 0.28 inch |
| E | Distance from raceway centre to the hole for lubrication | 7.1 mm |
| C _{dyn} | Dynamic load rating | 43.5 kN |
| C _o | Static load rating | 29 kN |
| kg | Mass | 1.11 kg |

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

