
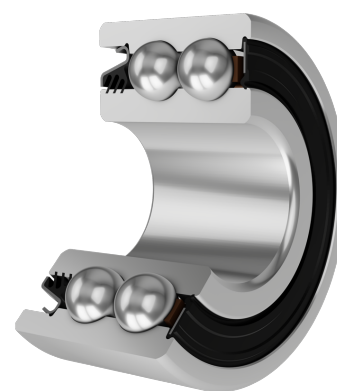


# Double Row Angular Contact Ball Bearings

## SL 3204 TRS

Double Row Angular Contact Ball Bearings  
 High-speed planter, precision seed drill

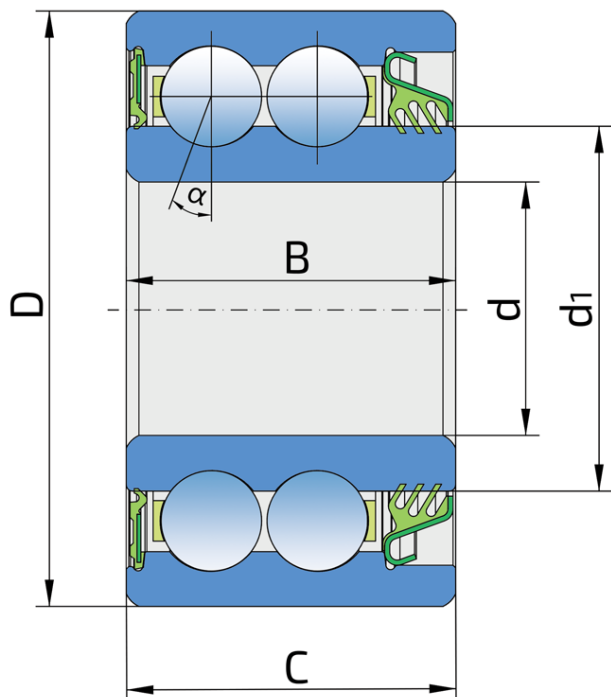

### Technical Specification

|                  |                             |          |
|------------------|-----------------------------|----------|
| d                | Bore diameter               | 20 mm    |
| d1               | Inner ring outside diameter | 28.8 mm  |
| D                | Outside diameter            | 47 mm    |
| C                | Width outer ring            | 26 mm    |
| B                | Width inner ring            | 26 mm    |
| $\alpha$         | Contact angle               | 25 °     |
| kg               | Mass                        | 0.196 kg |
| C <sub>dyn</sub> | Dynamic load rating         | 18.8 kN  |
| C <sub>o</sub>   | Static load rating          | 12.6 kN  |
| P <sub>u</sub>   | Fatigue load limit          | 0.529 kN |

## Sealing

---

### RS SEAL / T SEAL

RS seal on the base side and 3-lip seal on the front side which is exposed to contaminants.

The 3-lip seal on the front side protects the bearing from contaminant penetration.

&nbsp;

