


# **Bearing Unit**

# **PRB-45**

Bearing Unit

Packer Roller



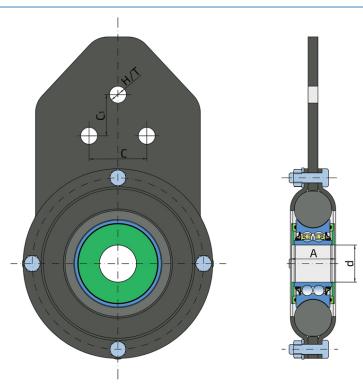



## **Technical Specification**

d	Bore diameter	45 mm
Α	Overall width	55 mm
С	Distance between holes	70 mm
C1	Distance between holes	50 mm
H/T	Hole/Thread	3x20.5 mm
kg	Mass	9.199 kg
Cdyn	Dynamic load rating	51 kN
Co	Static load rating	39 kN
Pu	Fatigue load limit	1.638 kN



### Sealing

### FRONTAL DOUBLE LIP SEAL + T SEAL / T SEAL + FRONTAL DOUBLE LIP SEAL

Triple lip seal and frontal double lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

