
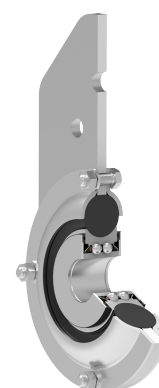
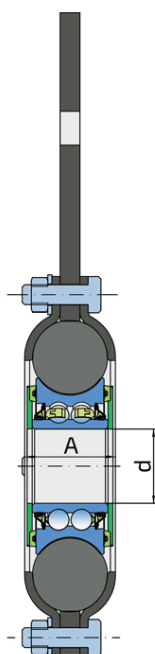


Bearing Unit

PRB-45

Bearing Unit
Packer Roller

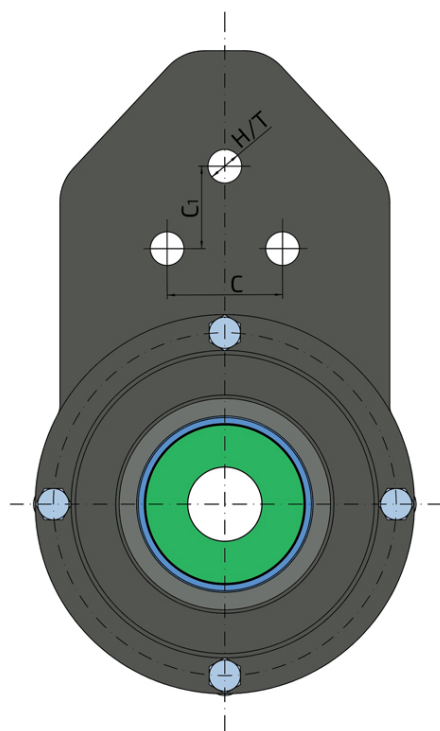

Technical Specification

d	Bore diameter	45 mm
A	Overall width	55 mm
C	Distance between holes	70 mm
C1	Distance between holes	50 mm
H/T	Hole/Thread	3x20.5 mm
kg	Mass	9.199 kg
C _{dyn}	Dynamic load rating	51 kN
C _o	Static load rating	39 kN
P _u	Fatigue load limit	1.638 kN

Sealing

FRONTAL DOUBLE LIP SEAL + T SEAL / T SEAL + FRONTAL DOUBLE LIP SEAL

Triple lip seal and frontal double lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

