
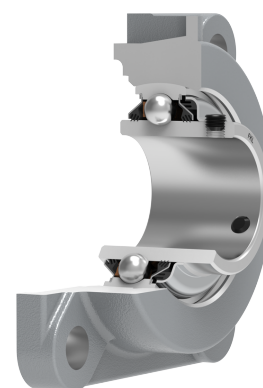
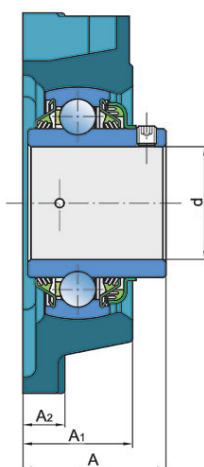


Armor Bearing Unit

LEFG 212 TDT.H

Armor Bearing Unit
 Universal Solution

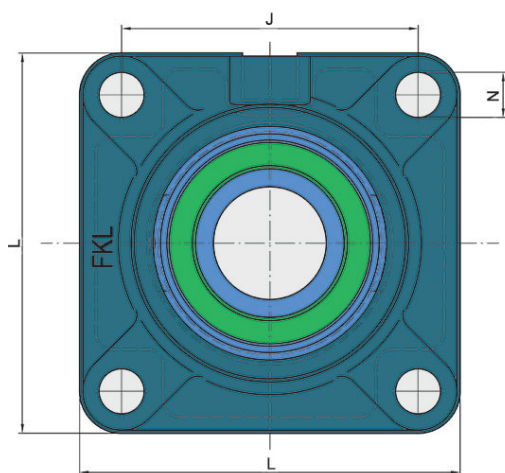

Technical Specification

| | | |
|------|----------------------------|----------|
| d | Bore diameter | 60 mm |
| A1 | Total housing width | 48 mm |
| A2 | Housing flange thickness | 19 mm |
| J | Distance between the holes | 143 mm |
| L | Total length | 175 mm |
| N | Hole diameter | 19 mm |
| A | Overall width | 68.5 mm |
| kg | Mass | 4.64 kg |
| Cdyn | Dynamic load rating | 52 kN |
| Co | Static load rating | 36 kN |
| Pu | Fatigue load limit | 1.512 kN |

Sealing

DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants. The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

