


## **LE 211 TDT**





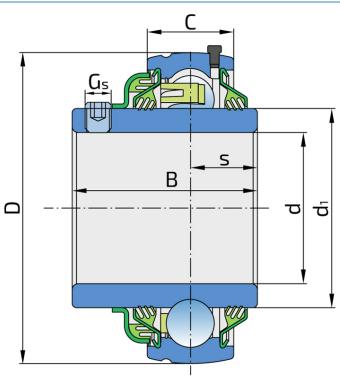

## **Technical Specification**

| d    | Bore diameter  | 55 mm    |
|------|--|----------|
| D    | Outside diameter                                     | 100 mm   |
| В    | Width inner ring                                     | 57 mm    |
| С    | Width outer ring                                     | 25 mm    |
| S    | Distance from inner ring side face to raceway centre | 22.2 mm  |
| d1   | Outer diameter inner ring                            | 69.1 mm  |
| Gs   | Set screw  | M10x1 mm |
| kg   | Mass   | 1.01 kg  |
| Cdyn | Dynamic load rating                                  | 43.6 kN  |
| Со   | Static load rating                                   | 29 kN    |
| Pu   | Fatigue load limit                                   | 1.218 kN |



## Sealing

## DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants. The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

