


LE 212 TDT

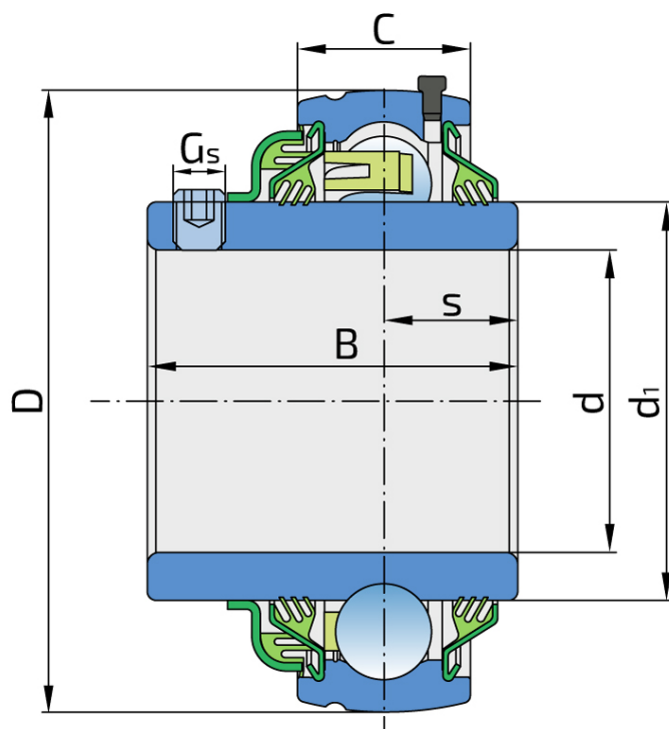

Technical Specification

d	Bore diameter	60 mm
D	Outside diameter	110 mm
B	Width inner ring	65.1 mm
C	Width outer ring	26 mm
s	Distance from inner ring side face to raceway centre	25.4 mm
d1	Outer diameter inner ring	75.64 mm
Gs	Set screw	M10x1 mm
kg	Mass	1.42 kg
Cdyn	Dynamic load rating	52 kN
Co	Static load rating	36 kN
Pu	Fatigue load limit	1.512 kN

Sealing

DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants. The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

