




FKL®

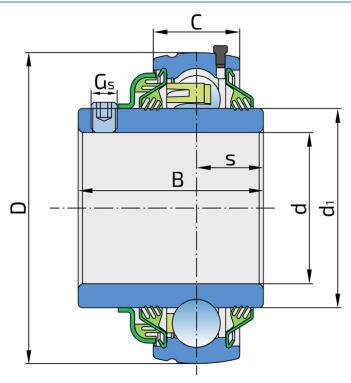

Technical Specification

d	Bore diameter	70 mm
D	Outside diameter	125 mm
В	Width inner ring	69.9 mm
С	Width outer ring	34 mm
S	Distance from inner ring side face to raceway centre	30.2 mm
dl	Outer diameter inner ring	87.05 mm
Gs	Set screw	M10x1 mm
kg	Mass	2.04 kg
Cdyn	Dynamic load rating	62.4 kN
Со	Static load rating	44 kN
Pu	Fatigue load limit	1.848 kN

Sealing

DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants. The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

