
Double Row Ball Bearings With Shaft

VP-16/40/74.5

Double Row Ball Bearings With Shaft Planter, seed drill

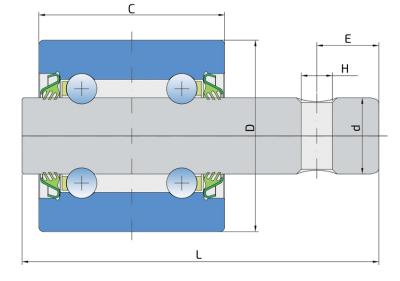

Technical Specification

D	Outside diameter	40 m	nm
d	Bore diameter	15.918 m	nm
L	Total length	74.5 m	nm
С	Width outer ring	38.9 m	nm
Е	Hole center line distance to the side face of the inner ring	12.95 m	nm
Н	Hole diameter	6.5 m	nm
α	Contact angle	0	>
kg	Mass	0.44 kg	<g< td=""></g<>
Cdyn	Dynamic load rating	5.15 kN	<n< td=""></n<>
Со	Static load rating	2.94 kN	<n< td=""></n<>
Pu	Fatigue load limit	0.124 kN	<n< td=""></n<>







Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.

