
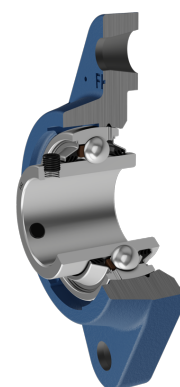


# Y-Bearing Flanged Units With Oval Grey Cast Iron Housing "N"

## LEN 209 2T

Y-Bearing Flanged Units With Oval Grey Cast Iron Housing "N"

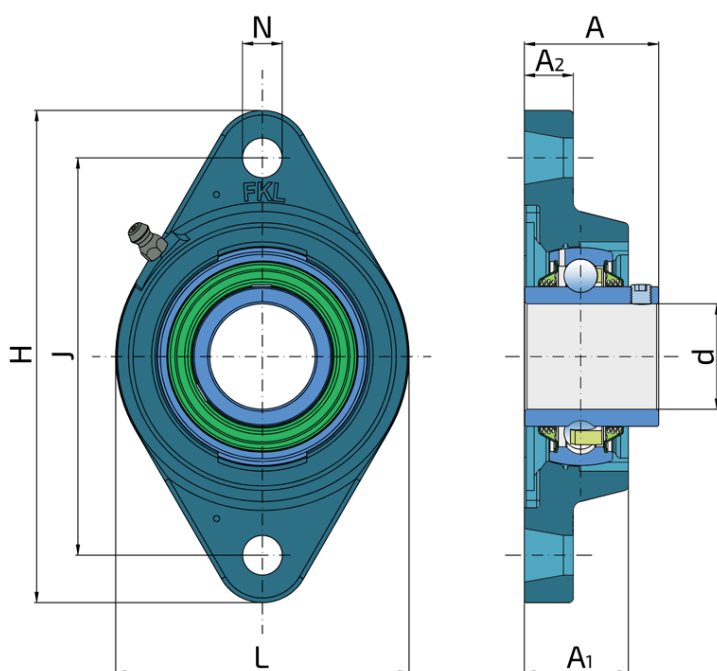

### Technical Specification

|      |  |          |
|------|--|----------|
| d    | Bore diameter  | 45 mm    |
| L    | Overall width  | 108 mm   |
| A    | Distance from the housing flange to the front of the inner ring of the bearing | 52.2 mm  |
| A1   | Total housing width  | 38 mm    |
| A2   | Housing flange thickness   | 18 mm    |
| H    | Housing height   | 188 mm   |
| J    | Distance between the holes   | 148 mm   |
| N    | Diameter of attachment slot  | 19 mm    |
| kg   | Mass   | 1.84 kg  |
| Cdyn | Dynamic load rating  | 33.2 kN  |
| Co   | Static load rating   | 21.6 kN  |
| Pu   | Fatigue load limit   | 0.915 kN |

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

