Bearing Unit

LSQFR 308-13.5 TDT.H.T

Bearing Unit

Packer Roller

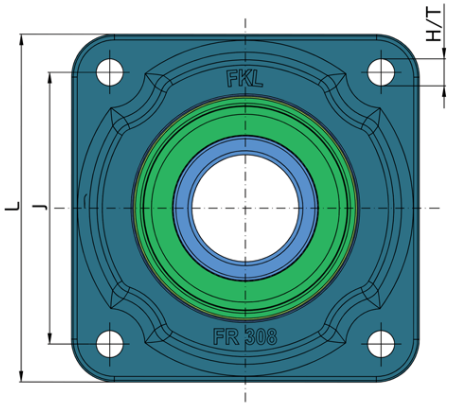

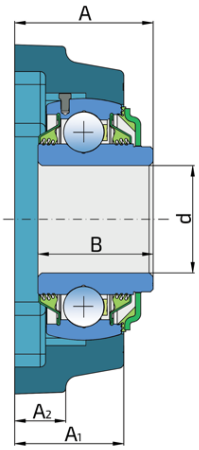

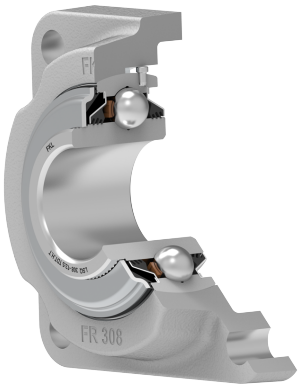

Technical Specification

d	Bore diameter	40	mm
L	Total length	130	mm
J	Distance between the holes	101.5	mm
H/T	Hole/Thread	13.5	mm
A	Overall width	51.4	mm
A1	Total housing width	40.6	mm
A2	Housing flange thickness	19	mm
B	Width inner ring	42.9	mm
kg	Mass	2.5	kg
Cdyn	Dynamic load rating	62.3	kN
Co	Static load rating	45.2	kN
Pu	Fatigue load limit	1.898	kN

Sealing

DOUBLE T SEAL / T SEAL



3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants.
The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.