


# Double Row Angular Contact Ball Bearing

## 5206 KPP3

Double Row Angular Contact Ball Bearing  
Seeding Machine

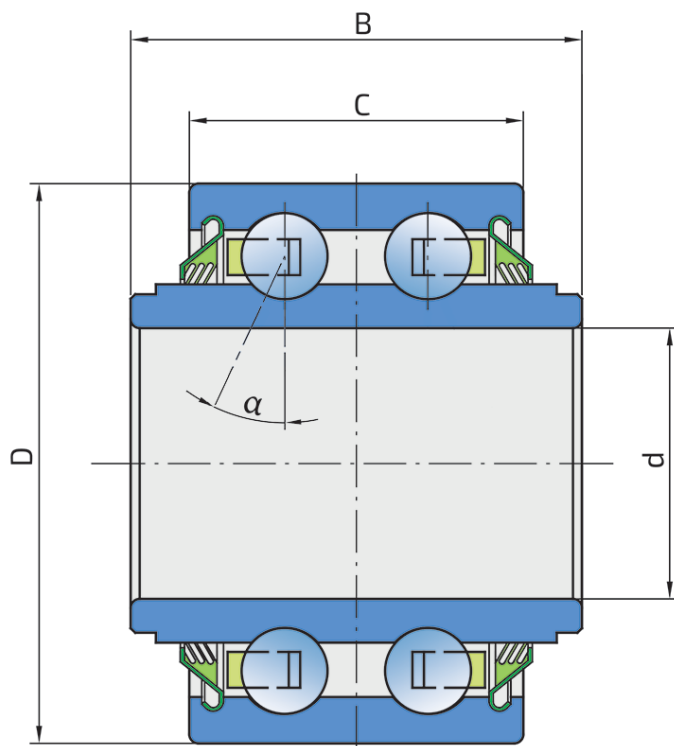

### Technical Specification

C <sub>dyn</sub>	Dynamic load rating	28.7 kN
C <sub>o</sub>	Static load rating	21.8 kN
D	Outside diameter	62 mm
d	Bore diameter	30.15 mm
C	D-shape hole cut out dimension	37 mm
kg	Mass	0.5 kg
B	Width inner ring	50 mm
α	Contact angle	25 °

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

