
Double Row Angular Contact Ball Bearing

5206 KPP3

Double Row Angular Contact Ball Bearing

Seeding Machine



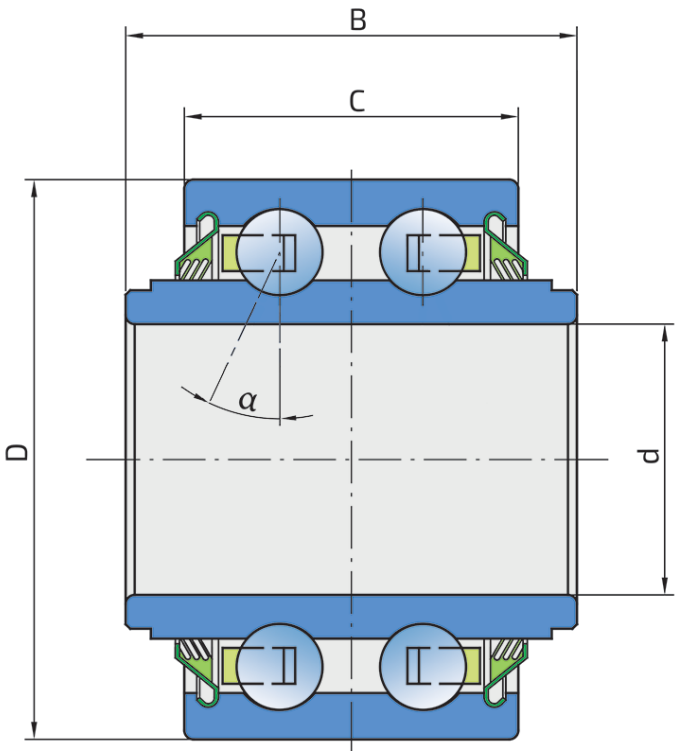




Technical Specification

d	Bore diameter	30.15	mm
D	Outside diameter	62	mm
B	Width inner ring	50	mm
C	Width outer ring	37	mm
α	Contact angle	20	°
kg	Mass	0.5	kg
Cdyn	Dynamic load rating	28.7	kN
Co	Static load rating	21.8	kN
Pu	Fatigue load limit	0.9156	kN

Sealing

T SEAL / T SEAL (2T)



3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on
the both side.