


# Bearing Unit (Double row angular contact ball bearing in pressed steel housing)

## PL-7516-SM

Bearing Unit (Double row angular contact ball bearing in pressed steel housing)

Seeding Machine

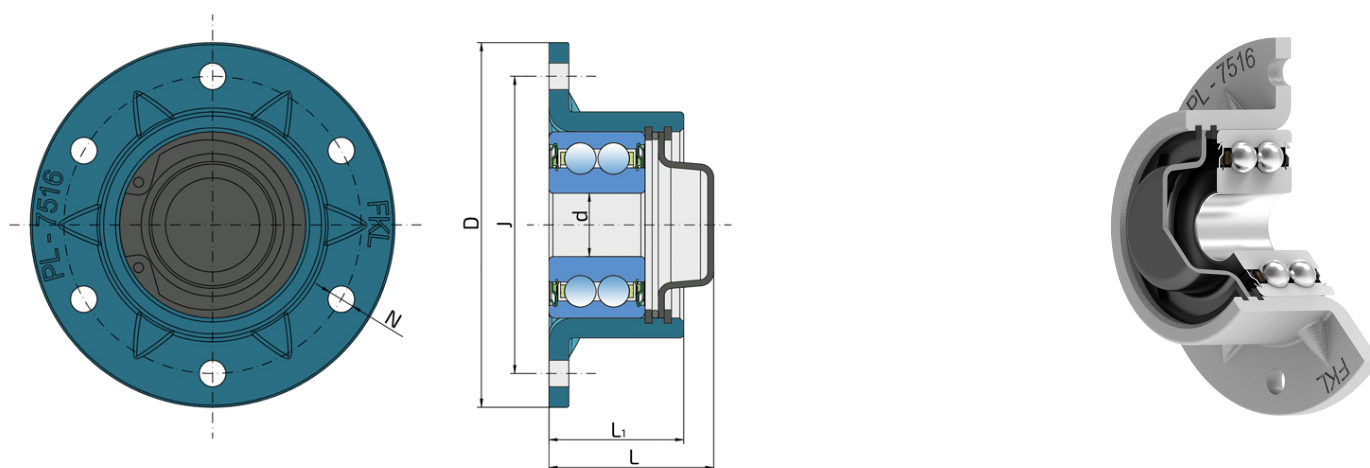

### Technical Specification

d	Bore diameter	16 mm
D	Outside diameter	92 mm
J	Pitch circle diameter	75 mm
L1	Total flange length	34 mm
L	Total length	41.55 mm
N	Hole diameter	6.7 mm
kg	Mass	0.54 kg
Cdyn	Dynamic load rating	16.5 kN
Co	Static load rating	11 kN
Pu	Fatigue load limit	0.462 kN

## Sealing

---

### S SEAL / S SEAL + O-RING + METAL CAP

S seal on the base side and S seal, O-ring and Metal cap on the front side which is exposed to the environment.

Metal cap protects the nut and reduces the penetration of contaminants.

&nbsp;

