
Double Row Angular Contact Ball Bearing

SL 5204/16.25-2T

Double Row Angular Contact Ball Bearing Precision planter



FKLO

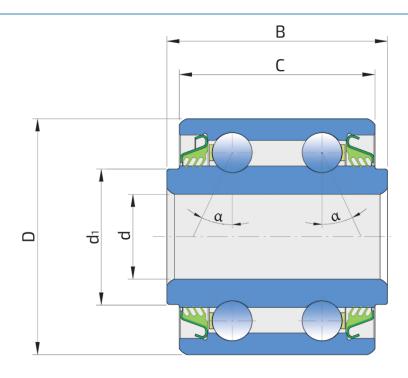



d	Bore diameter	16.25 mm
dl	Inner ring outside diameter	27 mm
D	Outside diameter	47 mm
В	Width inner ring	44 mm
С	Width outer ring	39 mm
α	Contact angle	25 °
kg	Mass	0.326 kg
Cdyn	Dynamic load rating	18.8 kN
Со	Static load rating	12.6 kN
Pu	Fatigue load limit	0.529 kN



Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.

