


Double Row Angular Contact Ball Bearing

SL 5204/16.25-2T

Double Row Angular Contact Ball Bearing
Precision planter

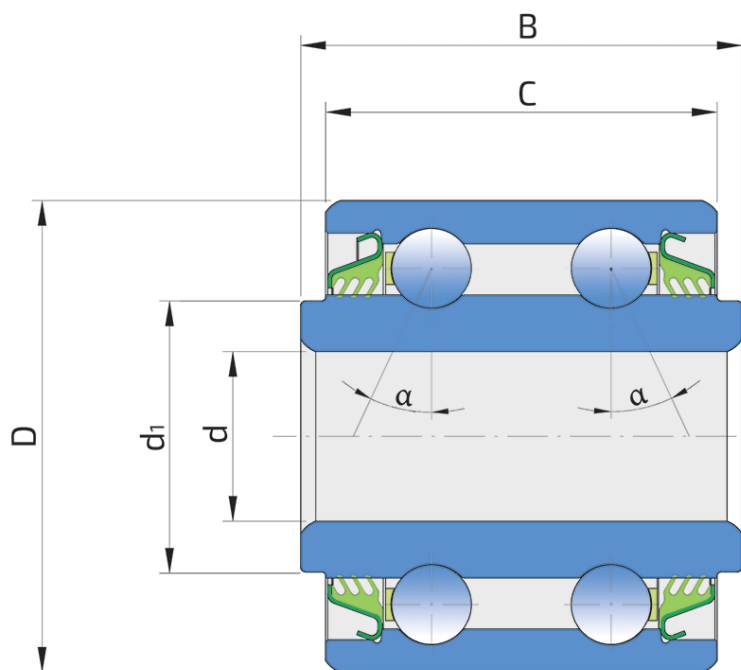

Technical Specification

d	Bore diameter	16.25 mm
d1	Inner ring outside diameter	27 mm
D	Outside diameter	47 mm
B	Width inner ring	44 mm
C	Width outer ring	39 mm
α	Contact angle	25 °
kg	Mass	0.326 kg
C _{dyn}	Dynamic load rating	18.8 kN
C _o	Static load rating	12.6 kN
P _u	Fatigue load limit	0.529 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

