


# Double Row Angular Contact Ball Bearing

## SL 5204/20-2T

Double Row Angular Contact Ball Bearing  
Seeder

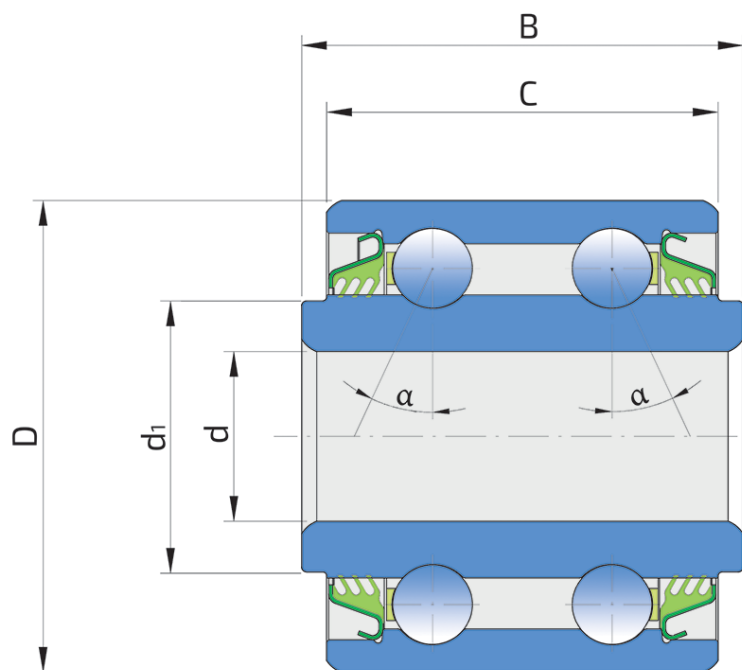

### Technical Specification

|          |                                |          |
|----------|--------------------------------|----------|
| d        | Bore diameter                  | 20 mm    |
| d1       | Inner ring outside diameter    | 27 mm    |
| D        | Outside diameter               | 47 mm    |
| B        | Width inner ring               | 44 mm    |
| C        | D-shape hole cut out dimension | 39 mm    |
| $\alpha$ | Contact angle                  | 25 °     |
| kg       | Mass                           | 0.29 kg  |
| Cdyn     | Dynamic load rating            | 18.8 kN  |
| Co       | Static load rating             | 12.6 kN  |
| Pu       | Fatigue load limit             | 0.529 kN |

## Sealing

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

