
Ball Bearing

Q 203PP.AH02*M

Ball Bearing

Seeding Machine; Sprocket



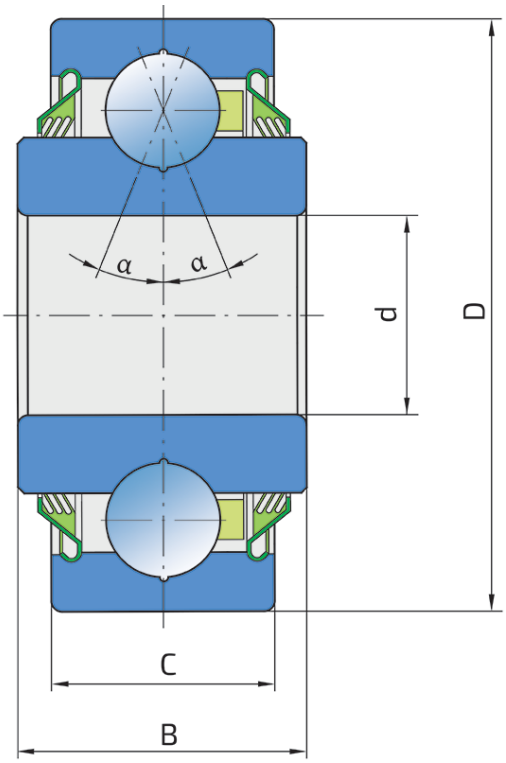




Technical Specification

d	Bore diameter	16.2	mm
D	Outside diameter	40	mm
B	Width inner ring	18.29	mm
C	Width outer ring	12	mm
α	Contact angle	25	°
kg	Mass	0.08	kg
Cdyn	Dynamic load rating	15.6	kN
Co	Static load rating	10	kN
Pu	Fatigue load limit	0.42	kN

Sealing

T SEAL / T SEAL (2T)



3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on
the both side.