


Ball bearing

6204-RSL3

Ball bearing

Seeding wheel



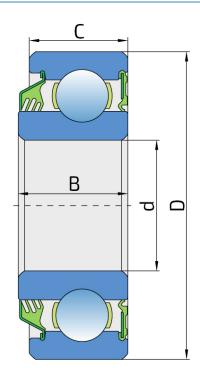



Technical Specification

| | Bore diameter | 20 mm |
|----------|---------------------|---------|
| u | bore diameter | 20 mm |
| D | Outside diameter | 47 mm |
| С | Width outer ring | 15 mm |
| В | Width inner ring | 16.5 mm |
| kg | Mass | 0.19 kg |
| Cdyn | Dynamic load rating | 12.8 kN |
| Co Pu | Static load rating | 6.2 kN |
| Pu | Fatigue load limit | 0.26 kN |



Sealing

RS SEAL / T SEAL

RS seal on the base side and 3-lip seal on the front side which is exposed to contaminants.

The 3-lip seal on the front side protects the bearing from contaminant penetration.

