
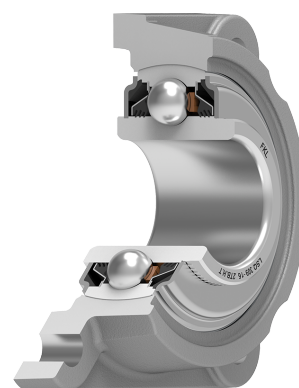


# Bearing Unit

## LSQFR 309-16 2TB.H.T

Bearing Unit  
Packer Roller

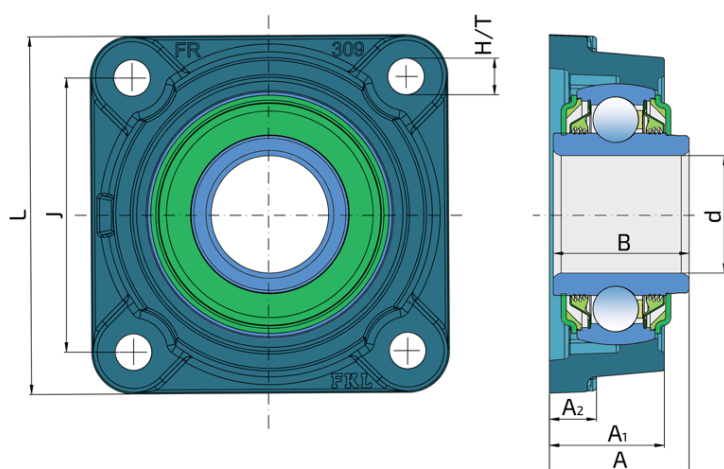

### Technical Specification

d	Bore diameter	45 mm
L	Total length	137 mm
J	Distance between the holes	105 mm
H/T	Hole/Thread	16 mm
A	Overall width	55 mm
A1	Total housing width	44 mm
A2	Housing flange thickness	22 mm
B	Width inner ring	51.1 mm
kg	Mass	3.4 kg
Cdyn	Dynamic load rating	80.8 kN
Co	Static load rating	59.6 kN
Pu	Fatigue load limit	2.503 kN

## Sealing

### RUBBERIZED FLINGER + T SEAL / T SEAL + RUBBERIZED FLINGER

Rubberized flinger with 3-lip seal on the base side and 3-lip seal with rubberized flinger on the front side which is exposed to contaminants.

The 3-lip seal protects the bearing from contaminant penetration. The rubberized flinger protects the seal from mechanical damage and provides additional sealing.

