


# Double Row Angular Contact Ball Bearing

## 3306 2RS

Double Row Angular Contact Ball Bearing

Disc Harrow

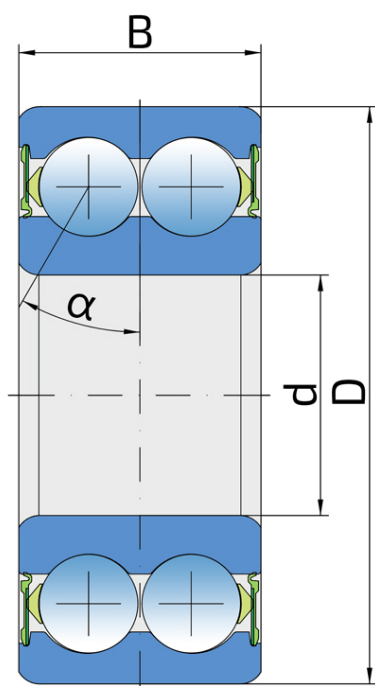

### Technical Specification

d	Bore diameter	30 mm
D	Outside diameter	72 mm
B	Width inner ring	30.2 mm
$\alpha$	Contact angle	30 °
kg	Mass	0.54 kg
Cdyn	Dynamic load rating	41.9 kN
Co	Static load rating	29.4 kN
Pu	Fatigue load limit	1.235 kN

## Sealing

---

### RS SEAL / RS SEAL (2RS)

The older type of the single seal. Prevents penetration of soil, dust and water and since exposed to the impact of abrasive particles is expendable more than some new types of seals. Due to extended friction, the permitted speeds are lower. It was gradually replaced with the improved versions of S. Because of the traditional reasons Y bearings with this kind of seal do not have the additional sealing mark. It is used with the Y-bearings and deep groove ball bearings.

