


# The Bearing Solution For Seeding Machines, Integrated Flange

## IL20-70/6H-74/2T-B16

The Bearing Solution For Seeding Machines, Integrated Flange Seeding Machine



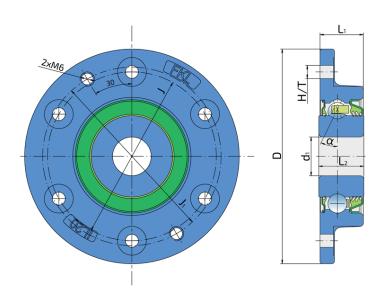



### **Technical Specification**

J	Pitch circle diameter	70 mm
J1	Pitch circle diameter	74 mm
D	Outside diameter	89 mm
H/T	Hole/Thread	6x5.4 mm
d1	Bore diameter	16.053 mm
L1	Total flange length	18 mm
L2	Bearing width	18.669 mm
α	Contact angle	25 °
kg	Mass	0.429 kg
Cdyn	Dynamic load rating	22 kN
Со	Static load rating	15.2 kN
Pu	Fatigue load limit	0.638 kN



### Sealing

#### S SEAL / T SEAL

S seal on the base side and the 3-lip seal on the front side.

S seal on the base side also protected with attached disc, protecting the bearing from contamination.

3-lip seal on the front side eliminates bearing contaminants.

