


## Ball bearing

### LS 208 TDT.H.T\*K

Ball bearing

Cultivator, disc seeders and tine seeders

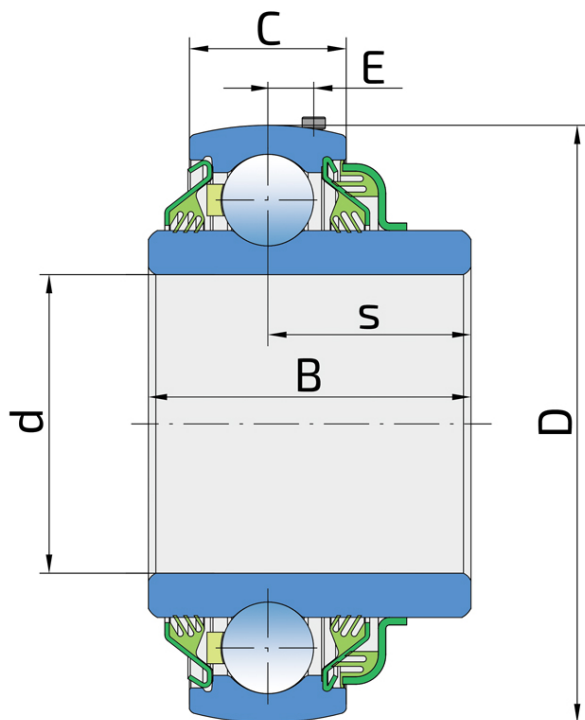

#### Technical Specification

d	Bore diameter	40 mm
D	Outside diameter	80 mm
B	Width inner ring	43.2 mm
C	Width outer ring	21 mm
E	Distance from raceway centre to the hole for lubrication	6.15 mm
s	Distance from inner ring side face to raceway centre	27.2 mm
kg	Mass	0.57 kg
C <sub>dyn</sub>	Dynamic load rating	30.7 kN
C <sub>o</sub>	Static load rating	19 kN
P <sub>u</sub>	Fatigue load limit	0.798 kN

## Sealing

---

### DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants.

The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

&nbsp;

