
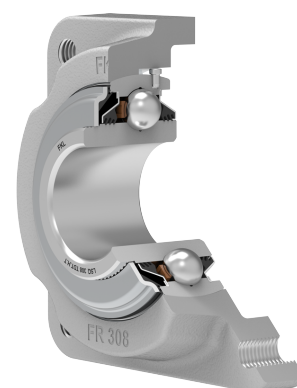


Bearing Unit

LSQFR 308 TDT.H.T

Bearing Unit
Packer Roller

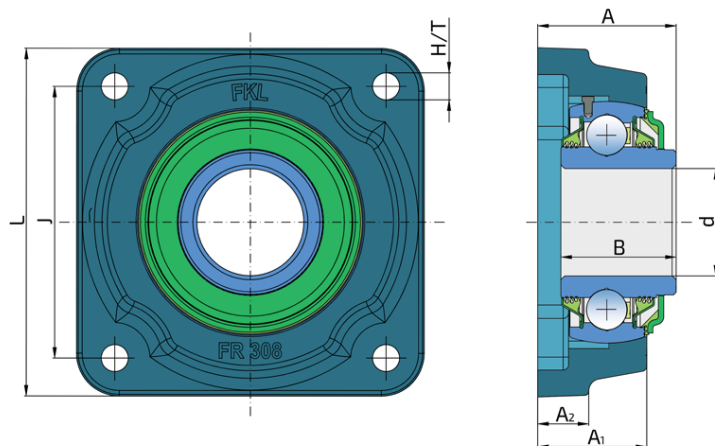

Technical Specification

d	Bore diameter	40 mm
L	Total length	130 mm
J	Distance between the holes	101.5 mm
H/T	Hole/Thread	M12 mm
A	Overall width	51.4 mm
A1	Total housing width	40.6 mm
A2	Housing flange thickness	19 mm
B	Width inner ring	42.9 mm
kg	Mass	2.5 kg
Cdyn	Dynamic load rating	62.3 kN
Co	Static load rating	45.2 kN
Pu	Fatigue load limit	1.898 kN

Sealing

DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants.

The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

