


Bearing Unit

LSNR 205 2T

Bearing Unit

Packer Roller



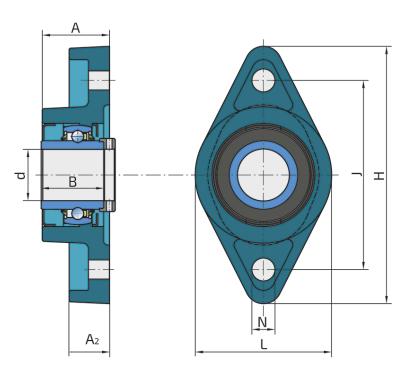



Technical Specification

| | Dave disprator | 25 |
|------|----------------------------|----------|
| d | Bore diameter | 25 mm |
| Н | Housing height | 135 mm |
| L | Total length | 71 mm |
| J | Distance between the holes | 99 mm |
| Α | Overall width | 35 mm |
| A2 | Housing flange thickness | 21 mm |
| В | Width inner ring | 34.8 mm |
| N | Hole diameter | 11 mm |
| kg | Mass | 0.91 kg |
| Cdyn | Dynamic load rating | 14 kN |
| Со | Static load rating | 7.8 kN |
| Pu | Fatigue load limit | 0.328 kN |
| | | |



Sealing

METAL COVER RING+T SEAL / T SEAL+METAL COVER RING

3-lip seal on the base side and 3-lip seal with Metal cover ring on the front side which is exposed to contaminants.

The 3-lip seal on the both side protects the bearing from contaminants. The Metal cover ring protects the seal from mechanical damage and from entanglement of grass stems of plants and twines.

