
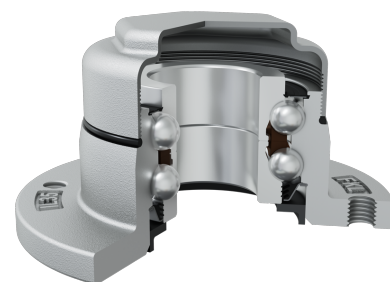
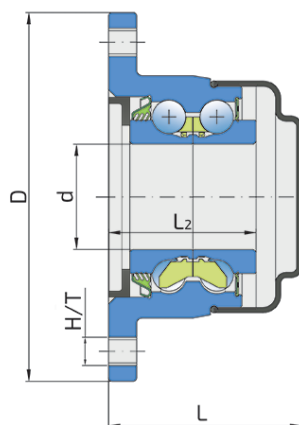


The Bearing Solution For Harsh Seeding Conditions And Coulter Discs Of Ploughs, Integrated Flange

IL35-88/4T-B30

The Bearing Solution For Harsh Seeding Conditions And Coulter Discs Of Ploughs, Integrated Flange

Seeding Machines and Manure Handling Machine

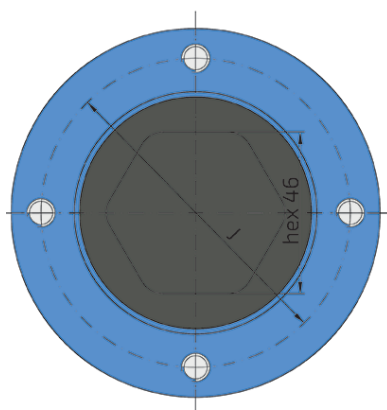

Technical Specification

J	Pitch circle diameter	88 mm
D	Outside diameter	105 mm
H/T	Hole/Thread	4x8x1.25 mm
d	Bore diameter	30 mm
L	Total length	55 mm
L2	Bearing width	42 mm
kg	Mass	1 kg
Cdyn	Dynamic load rating	37.5 kN
Co	Static load rating	26.5 kN
Pu	Fatigue load limit	1.11 kN

Sealing

PLASTIC COVER+T SEAL / RS SEAL+METAL PROTECTIVE CAP

3-lip seal on the base side and the RS seal with metal protective cap on the front side.

The plastic cover on the base side protects the seal from mechanical damage.

3-lip seal on the base side also protected with attached disc, protecting the bearing from contamination.

The RS seal with a Metal protective cap on the front side eliminates bearing contaminants.

