


Y-Ball Bearings With Integral Adapter Sleeve

UH 205/20 2S.H.T

Y-Ball Bearings With Integral Adapter Sleeve
Harvester

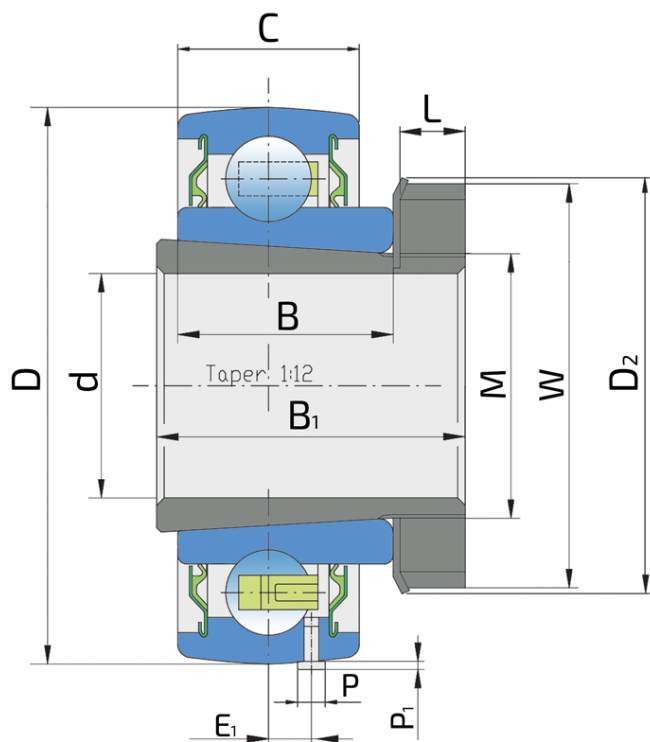

Technical Specification

| | | |
|------|--|-----------|
| d | Bore diameter | 20 mm |
| D | Outside diameter | 52 mm |
| W | KM nut outside diameter | 38 mm |
| D2 | MB Washer outside diameter | 42.3 mm |
| B | Width inner ring | 18 mm |
| B1 | Width adapter sleeve | 29 mm |
| C | Width outer ring | 16 mm |
| L | KM nut width | 7 mm |
| E1 | Distance from raceway center to the stopping pin | 4.3 mm |
| M | Thread adapter sleeve | 25x1.5 mm |
| P | Stopping pin diameter | 3 mm |
| P1 | Stopping pin high | 2 mm |
| kg | Mass | 0.2 kg |
| Cdyn | Dynamic load rating | 14 kN |
| Co | Static load rating | 7.8 kN |
| Pu | Fatigue load limit | 0.335 kN |

Sealing

S SEAL / S SEAL (2S)

Single lip seal with the labyrinth between the sheet part and the rubber lip which conducts the contact sealing. The friction and speeds are the same as with RS but provides much better protection against the rough impurity particles. This is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides contact sealing which prevents penetration of finer impurities, water, moisture, steam etc. Suitable for neutral conditions because of the presence of the foreign materials. It is used with the Y bearing (standard) and deep groove ball bearings.

