


# Y-Ball Bearings With Integral Adapter Sleeve

## UH 207/30 2S.H.T

Y-Ball Bearings With Integral Adapter Sleeve

Harvester

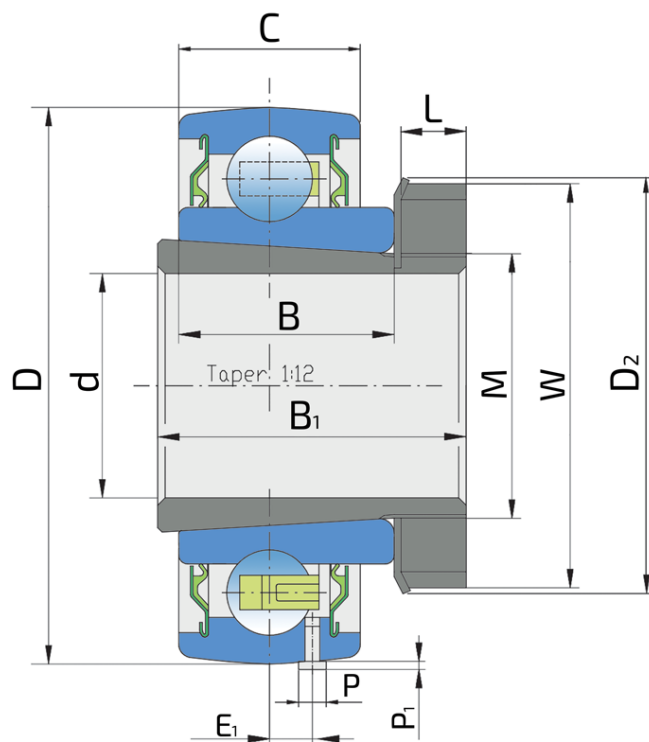

### Technical Specification

d	Bore diameter	30 mm
D	Outside diameter	72 mm
W	KM nut outside diameter	52 mm
D2	MB Washer outside diameter	57 mm
B	Width inner ring	22 mm
B1	Width adapter sleeve	35 mm
C	Width outer ring	19 mm
L	KM nut width	8 mm
E1	Distance from raceway center to the stopping pin	5.7 mm
M	Thread adapter sleeve	35x1.5 mm
P	Stopping pin diameter	3 mm
P1	Stopping pin high	2 mm
kg	Mass	0.47 kg
Cdyn	Dynamic load rating	25.5 kN
Co	Static load rating	15.3 kN
Pu	Fatigue load limit	0.655 kN

## Sealing

---

### S SEAL / S SEAL (2S)

Single lip seal with the labyrinth between the sheet part and the rubber lip which conducts the contact sealing. The friction and speeds are the same as with RS but provides much better protection against the rough impurity particles. This is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides contact sealing which prevents penetration of finer impurities, water, moisture, steam etc. Suitable for neutral conditions because of the presence of the foreign materials. It is used with the Y bearing (standard) and deep groove ball bearings.

