
Y-Ball Bearings With Standard Inner Ring

1726211 2RS1

Y-Ball Bearings With Standard Inner Ring



FKLO

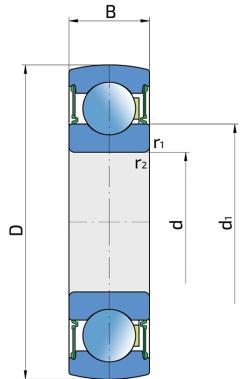


Technical Specification

kg	Mass	0.56 kg
Pu	Fatigue load limit	1.25 kN
Со	Static load rating	29 kN
Cdyn	Dynamic load rating	43.6 kN
r1,2	Inner ring Chamfer dimension	1.5 mm
dl	Outer diameter inner ring	69.1 mm
В	Width inner ring	21 mm
D	Outside diameter	100 mm
d	Bore diameter	55 mm

Sealing

RS SEAL / RS SEAL (2RS)

The older type of the single seal. Prevents penetration of soil, dust and water and since exposed to the impact of abrasive particles is expendable more than some new types of seals. Due to extended friction, the permitted speeds are lower. It was gradually replaced with the improved versions of S. Because of the traditional reasons Y bearings with this kind of seal do not have the additional sealing mark. It is used with the Y-bearings and deep groove ball bearings.



FKLO