
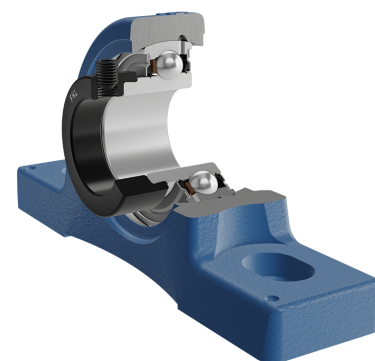


# Y-Bearing Plummer Block Units With Grey Cast Iron Housing "S"

## UYS 211 2S

Y-Bearing Plummer Block Units With Grey Cast Iron Housing "S"

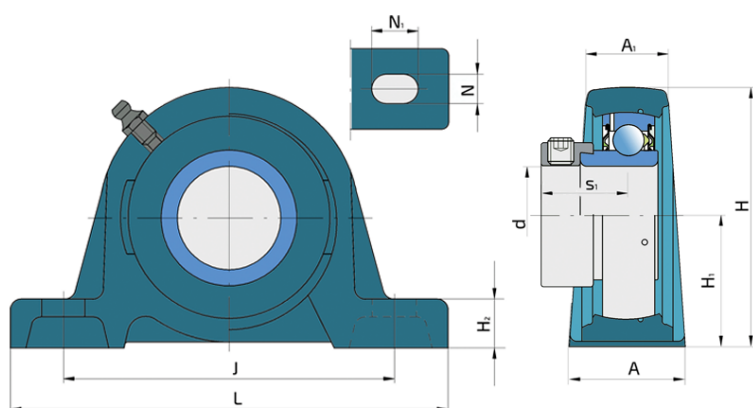

### Technical Specification

d	Bore diameter	55 mm
L	Overall length	219 mm
A	Housing contact surface width	60 mm
A1	Width of the top of the housing	40 mm
H	Housing height	125.5 mm
H1	Distance from the contact surface to the bearing axis	63.5 mm
H2	Housing foot thickness	24 mm
Jmin	Min. distance between the holes	163 mm
Jmax	Max. distance between the holes	180 mm
N	Height of attachment slot	20 mm
N1	Length attachment end	27.5 mm
s1	Distance from locking device side face to raceway centre	35.9 mm
kg	Mass	3.59 kg
Cdyn	Dynamic load rating	43.6 kN
Co	Static load rating	29 kN
Pu	Fatigue load limit	1.25 kN

## Sealing

---

### S SEAL / S SEAL (2S)

Single lip seal with the labyrinth between the sheet part and the rubber lip which conducts the contact sealing. The friction and speeds are the same as with RS but provides much better protection against the rough impurity particles. This is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides contact sealing which prevents penetration of finer impurities, water, moisture, steam etc. Suitable for neutral conditions because of the presence of the foreign materials. It is used with the Y bearing (standard) and deep groove ball bearings.

