
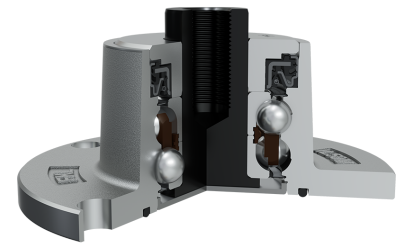


# Integrated Flange, Maintenance-Free Bearing For Independent Discs

## IL50-127/4H-3/4-16UNF

Integrated Flange, Maintenance-Free Bearing For Independent Discs  
Disc Harrow

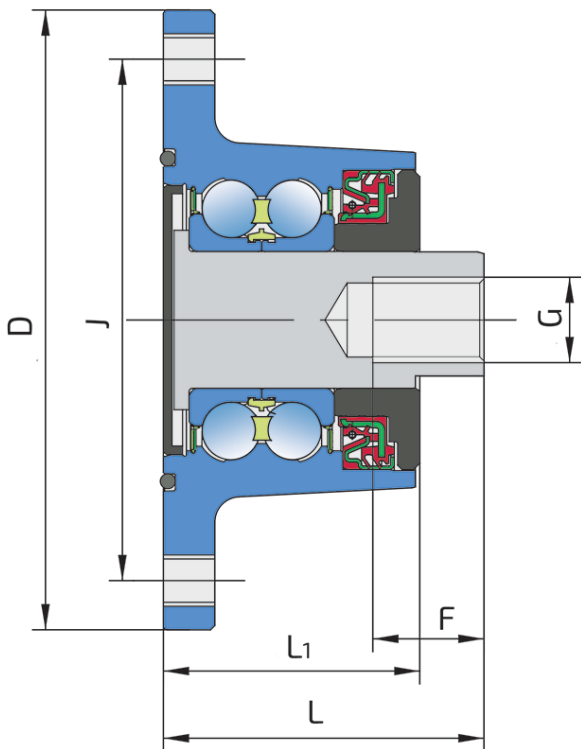

### Technical Specification

J	Pitch circle diameter	127 mm
D	Outside diameter	145 mm
H/T	Hole/Thread	4x13.5 mm
d	Bore diameter	31.8 mm
C	D-shape hole cut out dimension	29 mm
G	Internal Thread	3/4"-16UNF mm
L	Total length	71.5 mm
L1	Total flange length	60 mm
E	Length of D shape	11.5 mm
F	Length of threaded part	38.1 mm
kg	Mass	2.82 kg
Cdyn	Dynamic load rating	60 kN
Co	Static load rating	45.8 kN
Pu	Fatigue load limit	1.92 kN

## Sealing

### O-RING+SHEET METAL SHIELD+RS SEAL / RS SEAL+DIRTBLOCK SEAL+FORGED COVER PLATE

O-ring, Sheet metal shield and RS seal on the base side and RS seal, Dirtblock seal with Forged cover plate on the front side which is exposed to contaminants.

O-ring, Sheet metal shield and RS seal together with attached disc eliminates the possibility of contamination from the base side.

Dirtblock seal is designed for hard working condition at unfriendly environment. Half metal - half rubber outside diameter provides reliable seal retention in the bore and improves sealing performance. Inside diameter is covered by rubber and improves sealing performance and easy installation. Forged cover plate is additional, strong protection of the Dirtblock seal against mechanical damage.

This sealing provides maximum protection against liquid or solid contaminants, which significantly extends bearing service life.

