
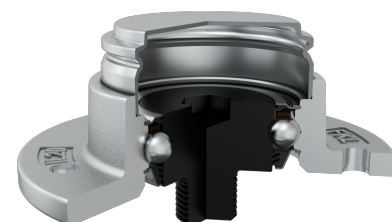


# The Bearing Solution For Seeding Machines, Integrated Flange

## IL20-75/5H-M16-L

The Bearing Solution For Seeding Machines, Integrated Flange  
Seeding Machine

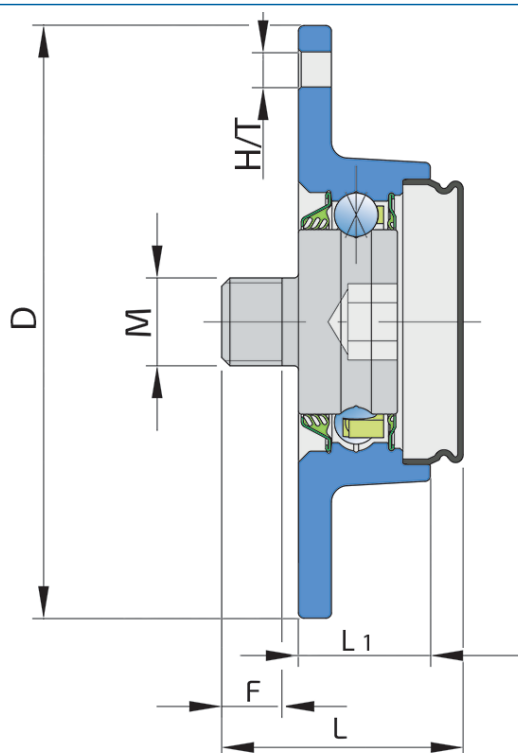

### Technical Specification

J	Pitch circle diameter	75 mm
D	Outside diameter	94 mm
H/T	Hole/Thread	5x6.7 mm
M	Outer Thread	M16x1.5-left mm
L	Total length	51.7 mm
L1	Total flange length	24 mm
F	Length of threaded part	14 mm
kg	Mass	0.53 kg
Cdyn	Dynamic load rating	22 kN
Co	Static load rating	15.2 kN
Pu	Fatigue load limit	0.64 kN

## Sealing

---

### T SEAL / S SEAL+METAL PROTECTIVE CAP

3-lip seal on the base side and the S seal with Metal protective cap on the front side.

3-lip seal on the base side also protected with attached disc, protecting the bearing from contamination.

S seal with a Metal protective cap on the front side eliminates bearing contaminants.

