


# Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

## W 208PPB23

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type



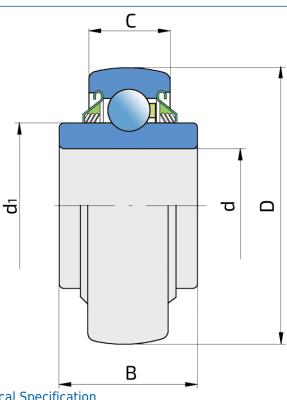



### **Technical Specification**

d	Bore diameter	1.5005 inch
d	Bore diameter	38.11 mm
D	Outside diameter	3.1496 inch
D	Outside diameter	80 mm
В	Width inner ring	1.691 inch
В	Width inner ring	42.96 mm
С	Width outer ring	1.185 inch
С	Width outer ring	30.1 mm
d1	Outer diameter inner ring	2.047 inch
d1	Outer diameter inner ring	52 mm
kg	Mass	0.68 kg
Cdyn	Dynamic load rating	32.5 kN
Со	Static load rating	19.8 kN
Pu	Fatigue load limit	0.832 kN



### Sealing

#### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

