


# Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

## W 209PPB2

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

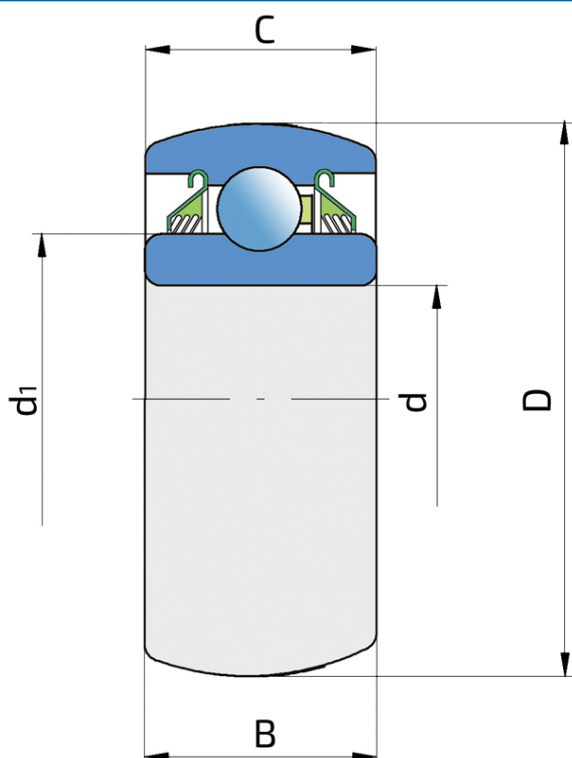

### Technical Specification

d	Bore diameter	1.7717 inch
d	Bore diameter	45 mm
D	Outside diameter	3.3465 inch
D	Outside diameter	85 mm
B	Width inner ring	1.188 inch
B	Width inner ring	30.2 mm
C	Width outer ring	1.188 inch
C	Width outer ring	30.18 mm
d1	Outer diameter inner ring	2.228 inch
d1	Outer diameter inner ring	56.6 mm
kg	Mass	0.65 kg
Cdyn	Dynamic load rating	32.5 kN
Co	Static load rating	20.4 kN
Pu	Fatigue load limit	0.857 kN

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

