


# Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

## W 209PPB4

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

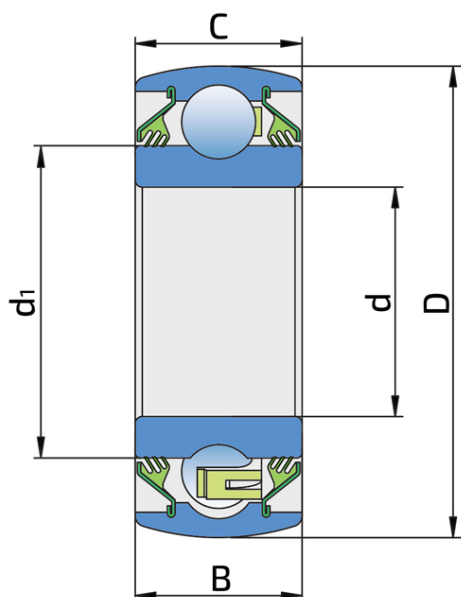

### Technical Specification

d	Bore diameter	1.5354 inch
d	Bore diameter	39 mm
D	Outside diameter	3.3465 inch
D	Outside diameter	85 mm
B	Width inner ring	1.188 inch
B	Width inner ring	30.18 mm
C	Width outer ring	1.188 inch
C	Width outer ring	30.18 mm
d1	Outer diameter inner ring	2.228 inch
d1	Outer diameter inner ring	56.6 mm
kg	Mass	0.75 kg
C <sub>dyn</sub>	Dynamic load rating	32.5 kN
C <sub>o</sub>	Static load rating	20.4 kN
P <sub>u</sub>	Fatigue load limit	0.857 kN

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

