
<u>Square Bore Series With Spherical Outer Ring -</u> <u>Non-Relubricable Type</u>

W 208PPB18

Square Bore Series With Spherical Outer Ring - Non-Relubricable Type



FKLO

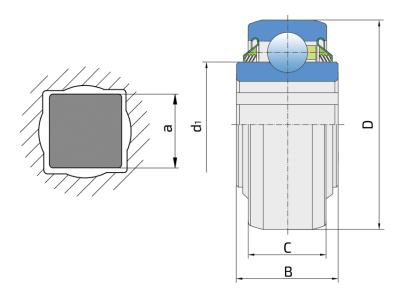



Technical Specification

D	Outside diameter	3.4386 inch
D	Outside diameter	87.34 mm
В	Width inner ring	1.438 inch
В	Width inner ring	36.5 mm
С	Width outer ring	1.188 inch
С	Width outer ring	30.18 mm
d1	Outer diameter inner ring	2.047 inch
dl	Outer diameter inner ring	52 mm
a	Shaft size	7/8 inch
a	Shaft size	22.2 mm
kg	Mass	0.93 kg
Cdyn	Dynamic load rating	32.5 kN
Со	Static load rating	19.8 kN
Pu	Fatigue load limit	0.832 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.

