


Round Bore Series With Cylindrical Outer Ring - Non-Relubricable Type

W 210PP2

Round Bore Series With Cylindrical Outer Ring - Non-Relubricable Type

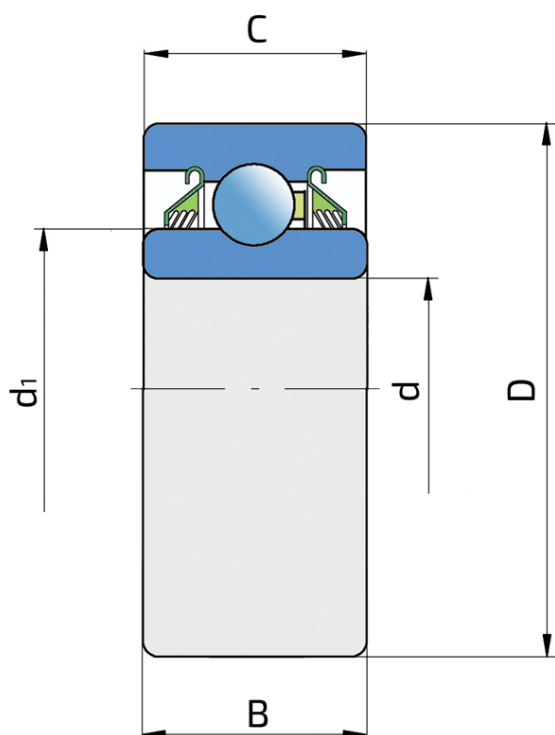

Technical Specification

| | | |
|------|---------------------------|-------------|
| d | Bore diameter | 1.9382 inch |
| d | Bore diameter | 49.23 mm |
| D | Outside diameter | 3.5433 inch |
| D | Outside diameter | 90 mm |
| B | Width inner ring | 1.188 inch |
| B | Width inner ring | 30.18 mm |
| C | Width outer ring | 1.188 inch |
| C | Width outer ring | 30.18 mm |
| d1 | Outer diameter inner ring | 2.461 inch |
| d1 | Outer diameter inner ring | 62.5 mm |
| Cdyn | Dynamic load rating | 35 kN |
| Co | Static load rating | 23.2 kN |
| kg | Mass | 1.21 kg |

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

