
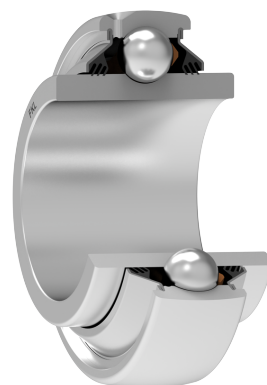


Round Bore Series With Spherical Outer Ring - Relubricable Type

GW 209PPB13

Round Bore Series With Spherical Outer Ring - Relubricable Type

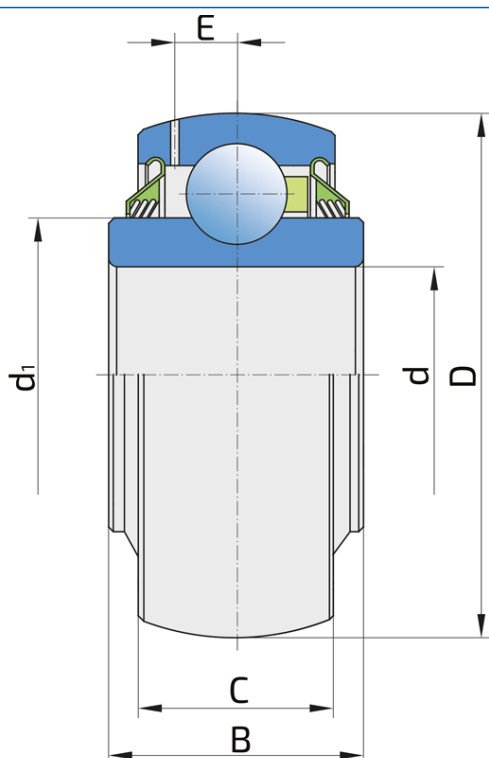

Technical Specification

d	Bore diameter	1.7811 inch
d	Bore diameter	45.24 mm
D	Outside diameter	3.347 inch
D	Outside diameter	85 mm
B	Width inner ring	1.438 inch
B	Width inner ring	36.53 mm
C	Width outer ring	1.185 inch
C	Width outer ring	30 mm
d1	Outer diameter inner ring	2.228 inch
d1	Outer diameter inner ring	56.6 mm
E	Distance from raceway centre to the hole for lubrication	0.256 inch
E	Distance from raceway centre to the hole for lubrication	6.5 mm
Cdyn	Dynamic load rating	32.5 kN
Co	Static load rating	20.4 kN
kg	Mass	0.65 kg
Pu	Fatigue load limit	0.857 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

