


# Round Bore Series With Spherical Outer Ring - Relubricable Type

## GW 211PPB20

Round Bore Series With Spherical Outer Ring - Relubricable Type

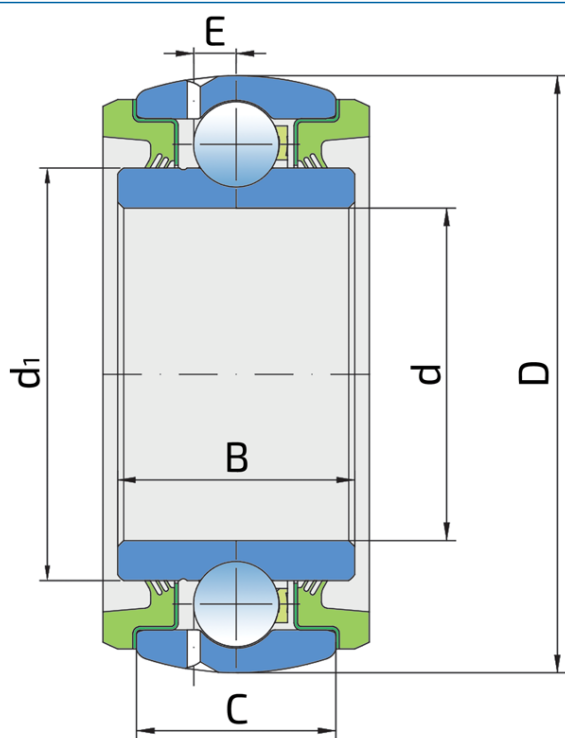

### Technical Specification

d	Bore diameter	2.1878 inch
d	Bore diameter	55.7 mm
D	Outside diameter	3.937 inch
D	Outside diameter	100 mm
B	Width inner ring	1.563 inch
B	Width inner ring	39.7 mm
C	Width outer ring	1.323 inch
C	Width outer ring	33.6 mm
d1	Outer diameter inner ring	2.72 inch
d1	Outer diameter inner ring	69.1 mm
E	Distance from raceway centre to the hole for lubrication	0.28 inch
E	Distance from raceway centre to the hole for lubrication	7.1 mm
Cdyn	Dynamic load rating	42.5 kN
Co	Static load rating	29 kN
kg	Mass	1.03 kg

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

