


Integrirana prirubnica, trajno podmazan ležaj

IL40-120/6T-2xM16

Integrirana prirubnica, trajno podmazan ležaj

Tanjirača

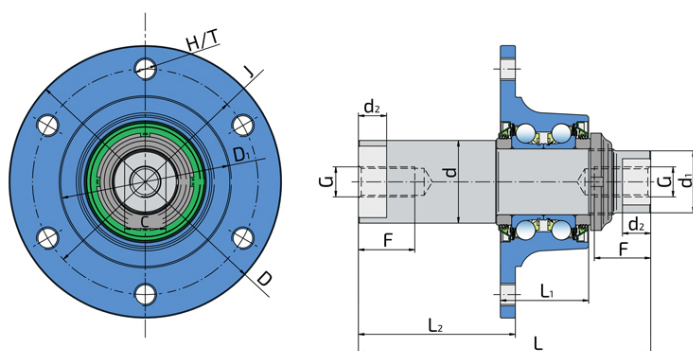

Tehničke Specifikacije

J	Prečnik podeonog kruga	120 mm
D	Spoljni prečnik ležaja	145 mm
D1	Rupa na disku	90 mm
d	Prečnik osovine	44 mm
d1	Prečnik osovine	33 mm
d2	Dužina obrađenog ravnog dela osovine	15 mm
C	Visina zaravnjenja D otvoda	2x22 mm
G	Unutrašnji navoj	M16x1.5 mm
L	Ukupna dužina	155.5 mm
L1	Ukupna širina prirubnica	47 mm
L2	Rastojanje od prednjeg kraja osovine do čelone površine prirubnice	83.5 mm
F	Dužina navoja	30 mm
kg	Masa	3.08 kg
Cdyn	Dinamička nosivost	42.9 kN
Co	Statička nosivost	36.3 kN
Pu	Granična zamorna nisivost	1.525 kN

Zaptivanje

T ZAPTIVKA + RS ZAPTIVKA / RS ZAPTIVKA + T ZAPTIVKA

The 3-lip seal combined with an RS seal on both sides provides optimal protection of the bearing against contamination, moisture, and dust.

The 3-lip seal acts as the primary barrier against external contaminants, while the RS seal ensures additional grease retention and protection of the internal bearing area. This configuration ensures long service life and high reliability under demanding operating conditions.

