


Y-Ball Bearings With Standard Inner Ring

US 210 2S

Y-Ball Bearings With Standard Inner Ring

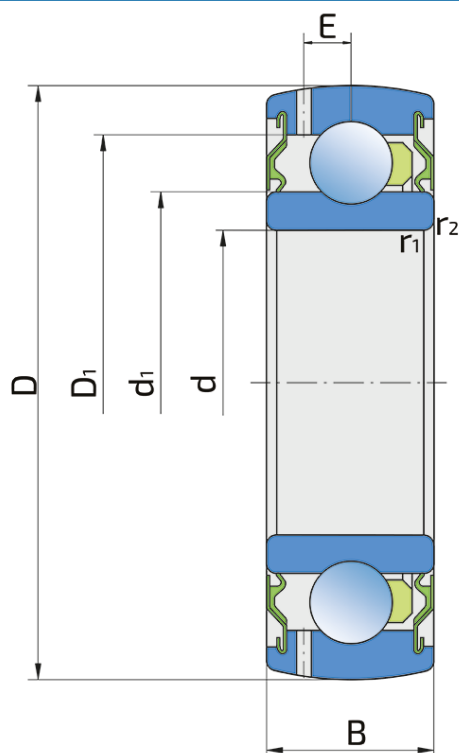

Technical Specification

d	Bore diameter	50 mm
D	Outside diameter	90 mm
B	Width inner ring	20 mm
d1	Outer diameter inner ring	62.5 mm
E	Distance from raceway centre to the hole for lubrication	6.4 mm
r1,2	Inner ring Chamfer dimension	1.1 mm
D1	Hole diameter	78.2 mm
Cdyn	Dynamic load rating	35 kN
Co	Static load rating	23.2 kN
Pu	Fatigue load limit	0.695 kN
kg	Mass	0.45 kg

Sealing

S SEAL / S SEAL (2S)

Single lip seal with the labyrinth between the sheet part and the rubber lip which conducts the contact sealing. The friction and speeds are the same as with RS but provides much better protection against the rough impurity particles. This is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides contact sealing which prevents penetration of finer impurities, water, moisture, steam etc. Suitable for neutral conditions because of the presence of the foreign materials. It is used with the Y bearing (standard) and deep groove ball bearings.

